




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B01D 53/32, 53/94, F01N 3/08, 3/20, 3/02		(11) International Publication Number: WO 99/38603
A1		(43) International Publication Date: 5 August 1999 (05.08.99)
(21) International Application Number: PCT/GB99/00212 (22) International Filing Date: 21 January 1999 (21.01.99) (30) Priority Data: 9801775.9 29 January 1998 (29.01.98) GB (71) Applicant (for all designated States except US): AEA TECHNOLOGY PLC [GB/GB]; 329 Harwell, Didcot, Oxfordshire OX11 0RA (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): SEGAL, David, Leslie [GB/GB]; 43 Foxborough Road, Radley, Abingdon, Oxfordshire OX14 3AB (GB). (74) Agents: WOOD, Paul, Austin et al.; AEA Technology plc, Patents Dept., 329 Harwell, Didcot, Oxfordshire OX11 0RA (GB).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: PLASMA ASSISTED PROCESSING OF GAS

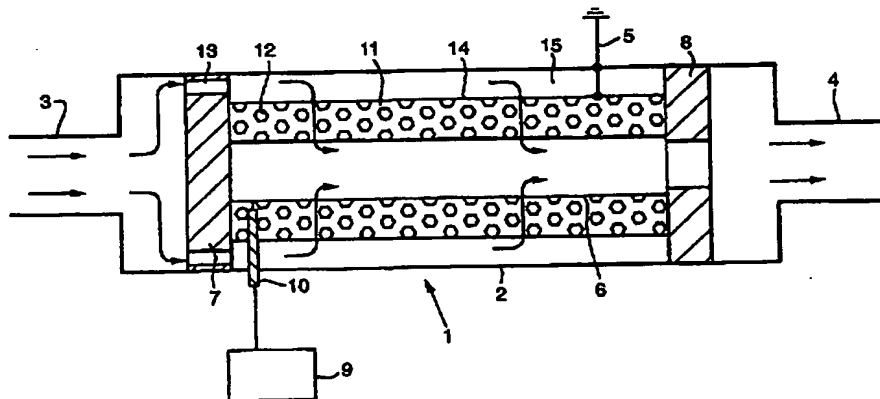

(57) Abstract

A plasma assisted reactor for the simultaneous removal of nitrogen oxides and carbonaceous combustion products from the exhaust emissions, in particular, from an internal combustion engine, wherein the reactor includes a gas permeable bed made of a mixed metal oxide having the general formula $A_{2-x}A'_xB_{1-y}B'_yO_4$.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

- 1 -

Plasma assisted processing of gas

The present invention relates to the plasma-assisted processing of gaseous media and in particular to the reduction of the emission of carbonaceous and nitrogenous combustion products from the exhausts of internal combustion engines.

One of the major problems associated with the development and use of internal combustion engines is the noxious exhaust emissions from such engines. Two of the most deleterious materials, particularly in the case of diesel engines, are particulate matter (primarily carbon) and oxides of nitrogen (NO_x). Increasingly severe emission control regulations are forcing internal combustion engine and vehicle manufacturers to find more efficient ways of removing these materials in particular from internal combustion engine exhaust emissions. Unfortunately, in practice, it is found that a number of techniques which improve the situation in relation to one of the above components of internal combustion engine exhaust emissions tend to worsen the situation in relation to the other. Even so, a variety of systems for trapping particulate emissions from internal combustion engine exhausts have been investigated, particularly in relation to making such particulate emission traps capable of being regenerated when they have become saturated with particulate material.

Examples of such diesel exhaust particulate filters are to be found in European patent application EP 0 010 384; US patents 4,505,107; 4,485,622; 4,427,418; and 4,276,066; EP 0 244 061; EP 0 112 634 and EP 0 132 166.

In all the above cases, the particulate matter is removed from diesel exhaust gases by a simple physical

trapping of particulate matter in the interstices of a porous, usually ceramic, filter body, which is then regenerated by heating the filter body to a temperature at which the trapped diesel exhaust particulates are
5 burnt off. In most cases the filter body is monolithic, although EP 0 010 384 does mention the use of ceramic beads, wire meshes or metal screens as well. US patent 4,427,418 discloses the use of ceramic coated wire or ceramic fibres.

10

GB patent 2,274,412 discloses a method and apparatus for removing particulate and other pollutants from internal combustion engine exhaust gases, in which the exhaust gases are passed through a bed of charged pellets
15 of material, preferably ferroelectric, having high dielectric constant. In addition to removing particulates by oxidation, especially electric discharge assisted oxidation, there is disclosed the reduction of NO_x gases to nitrogen, by the use of pellets adapted to
20 catalyse the NO_x reduction as exemplified by the use of barium titanate as the ferroelectric material for the pellets.

Also, US patents 3 983 021, 5 147 516 and 5 284 556
25 disclose the catalytic reduction of nitrogen oxides. However, US 3 983 021 is solely concerned with the reduction of NO to N in a silent glow discharge, the temperature of which is kept below a value at which the oxidation of N or NO to higher oxides of nitrogen does
30 not occur. There is no mention of any simultaneous removal of hydrocarbons.

Although, so-called contact bodies are used in the process of US 3 983 021, and some of those disclosed may
35 have some catalytic properties, catalysis does not appear

- 3 -

to be a necessary feature of the process of US 3 983 021. Other surface properties, such as adsorption on large surface area materials, are the basis of the process of US 3 983 021.

5

US patent 5 147 516 does refer to the use of catalysts to remove NO_x , but the catalytic materials involved are defined very specifically as being sulphur-tolerant and deriving their catalytic activity from their form rather than their surface properties.

Also, the operating conditions are very tightly defined. There is no specific mention of the type, if any, of electric discharge involved. All that is disclosed is that the NO_x removal depends upon electron-molecule interactions, facilitated by the structure of the 'corona-catalytic' materials not the inter-molecular interactions involved in the present invention. There is no mention of the simultaneous removal of hydrocarbons from the gas streams being treated by the invention of US 5 147 516.

US patent 5 284 556 does disclose the removal of hydrocarbons from internal combustion engine exhaust emissions. However, the process involved is purely one of dissociation in an electrical discharge of the so-called 'silent' type, that is to say, a discharge which occurs between two electrodes at least one of which is insulated. The device described is an open discharge chamber, not a packed bed device. Mention is made of the possible deposition of a NO_x -reducing catalyst on one of the electrodes.

In a broader context, the precipitation of charged particulate matter by electrostatic forces also is known.

However, in this case, precipitation usually takes place upon larger planar electrodes or metal screens.

The use of layered perovskite materials having the
5 general formula $A_{2-x}A^1_xB_{1-y}B^1_yO_4$, or when $A = A^1$ and $B = B^1$,
 A_2BO_4 , for the reduction of NO_x by diesel soot
particulates in the presence of excess oxygen has been
discussed by Yosutake Teraoka et al in a paper
'Simultaneous Catalytic Removal of NO_x and Diesel Soot
10 Particulate Over Perovskite-related Oxides' Catalysis
Today volume 27, (1996) 107 - 115 and Guido Saracco et al
in a paper 'Simultaneous Abatement of Diesel Soot and NO_x
by Perovskite-type Catalysts' Ceramic Transactions volume
73, 27 - 38 (1997). However, in both cases, the papers
15 are concerned solely with elucidating the chemical
reactions involved and are not concerned with the design
of practicable reactors for use with internal combustion
engines. The materials studied are used passively, that
is to say, apart from possibly being heated, they are
20 subjected to no external influences.

According to the present invention in one of its
aspects there is provided a plasma assisted reactor for
the simultaneous removal of nitrogen oxides and
25 carbonaceous combustion products from exhaust gases,
comprising a reactor chamber adapted to be connected into
a gas exhaust system, a gas permeable bed of an active
material contained within the reactor, means for causing
exhaust gases to pass through the bed of active material,
30 and means for exciting into a plasma state exhaust gases
passing through the bed of active material, characterised
in that the bed of active material includes a mixed metal
oxide material having the general formula $A_{2-x}A^1_xB_{1-y}B^1_yO_4$.

- 5 -

According to the present invention in another of its aspects there is provided a plasma assisted reactor for the simultaneous removal of nitrogen oxides and

5 carbonaceous combustion products from internal combustion engine exhaust gases, comprising a reactor chamber adapted to be connected into the exhaust system of an internal combustion engine, a gas permeable bed of an active material contained within the reactor, means for

10 causing exhaust gases to pass through the bed of active material, and means for exciting into a plasma state exhaust gases passing through the bed of active material, characterised in that the bed of active material includes a mixed metal oxide material having the general formula

15 $A_{2-x}A_x^1B_{1-y}B_y^1O_4$.

The reactor can be separated into two components in the first of which the gaseous medium is excited into the plasma state and in the second of which the excited

20 gaseous medium is contacted with the mixed metal oxide active material.

The exciting components of the reactor can be of any convenient form such as is disclosed in our earlier

25 patent GB 2,274,412 or a corona discharge device or dielectric barrier device also known as a silent discharge device.

Preferably the bed of active material is in the form

30 of an agglomeration of bodies of the active material in the form of spheres, regularly or irregularly shaped pellets, or hollow extrudates. The bodies of the active material may include a ceramic binder for example silica, alumina or titania or any combinations thereof, for

35 example silica-titania. The binder may be gel-derived, particularly when spheres of the active material are to

- 6 -

be made.

Many layered perovskite compositions can be produced when A, A¹ are selected from the elements La, Sr, Ba and
5 K, and B B¹ are selected from the elements Co, Mn, Cr, Cu, Mg and V. Examples are La_{1.8}Ba_{0.2}CuO₄;
La_{1.7}Sr_{0.3}Cu_{0.9}V_{0.1}O₄; La_{1.9}K_{0.1}Cu_{0.7}Cr_{0.3}O₄; La_{1.8}Ba_{0.2}Cr_{0.7}V_{0.3}O₄
and La_{1.9}K_{0.1}Cu_{0.95}V_{0.05}O₄. The last of these is particularly
suitable for use in performing the invention as is the
10 basic material La₂CuO₄.

The invention will now be described, by way of example, with reference to the accompanying drawings in which,
15

Figure 1 is a longitudinal section of a reactor embodying the invention for the simultaneous removal of nitrogen oxides and particulate carbon from the exhaust emissions from an internal combustion engine, and
20

Figure 2 is a longitudinal section of a second embodiment of the invention.

Referring to Figure 1 of the drawings, a reactor 1
25 for removing simultaneously NO_x and particulate carbonaceous combustion products, from the exhaust from an internal combustion engine consists of a cylindrical stainless steel chamber 2 which has an inlet stub 3 and an outlet stub 4 by means of which it can be connected
30 into the exhaust system of an internal combustion engine. The chamber 2 is arranged, in use, to be connected to an earthing point 5. Perforated cylindrical stainless steel inner and outer electrodes 6 and 14 are positioned co-axially within the chamber 2 by means of two electrically

- 7 -

insulating supports 7 and 8. The space 11 bounded by the electrodes 6 and 14 and the supports 7 and 8 is filled, in this example, with a bed of pellets of active material illustrated highly diagrammatically at 12. The upstream
5 end of the inner electrode 6 is closed off and is arranged to be connected via an insulating feedthrough 10 to a source 9 of an electrical potential sufficient to excite a non-thermal plasma in the exhaust gases in the interstices between the pellets 12. A convenient
10 potential for this purpose is a potential of about 10 kV to 30 kV which may be a regularly pulsed direct potential or a continuously varying alternating potential, or may be an interrupted continuous direct potential. Typically we employ a potential of 20 kV per 30 mm of bed depth.

15

The support 7 nearer the inlet stub 3 has a number of axial holes 13 disposed regularly around its periphery so that incoming exhaust gases are constrained to pass into the space 15 between the outer electrode 14 and the
20 chamber 2 of the reactor 1 and thence radially through the bed 12 of active material before passing through the inner electrode 6 and leaving the chamber 2 via the exhaust stub 4.

25

The bed 12 of active material consists of an agglomeration of spheres of a layered perovskite, such as La_2CuO_4 . Another layered perovskite material from which the spheres can be made is the partially substituted material $\text{La}_{1.9}\text{K}_{0.1}\text{Cu}_{0.95}\text{V}_{0.05}\text{O}_4$.

30

The spheres include a ceramic binder such as silica alumina or titania or combinations of these where the binder can, for example, be derived from sol-gel materials or from fine powder. A typical proportion of
35 binder material is three weight per cent. Also, other

- 8 -

shapes can be used for the pellets, for example, they can be irregular shapes, or extrudates - the manufacture of the latter form of pellets can be facilitated by the inclusion of a ceramic binder such as a silica-titania gel in the precursor material from which the pellets are made.

Other mixed oxides having the general formula $A_{2-x}A_x^1B_{1-y}B_y^1O_4$ can be used, as can other ceramic binders, providing that they have dielectric constants which are sufficient to enable a plasma to be established and maintained in the exhaust gases in the interstices between the pellets, beads or extrudates which form the bed 12 in the reactor. Alternatively, or additionally, a dielectric barrier between the electrodes (6, 14) can be provided so that the reactor operates as a dielectric barrier type of reactor. Such a dielectric barrier is most conveniently provided in the form of a coating on one or both of the electrodes (6, 14). A further alternative is to include with the mixed oxide material a proportion of an additional material of high dielectric permittivity such as a barium titanate.

In the embodiment of the invention described above, the perovskite active material in the pellet bed 12 is used also as a dielectric medium, by means of which the exhaust gases passing through the reactor 1 can be subjected to sufficient electric stress to excite them to a plasma state. However, this is not a necessary feature of the invention and the exhaust gases can be subjected to a separate excitation process before being exposed to the perovskite material.

Figure 2 shows a second embodiment in which this is done, and in which those components which are similar to

- 9 -

corresponding components of the first embodiment have the same reference numerals. The reactor chamber 1 is extended and contains a first excitation reactor similar to that described above, but in which the perovskite pellets 12 are replaced by pellets of a dielectric, preferably ferroelectric, material chosen to optimise the excitation of the exhaust gases, and a second reactor similar in layout to the first reactor, but in which there are no electrical connections to the bed 11 of pellets 12 of perovskite active material.

Other forms of excitation reactor involving a non-thermal plasma, such as a corona discharge reactor or dielectric barrier or silent discharge reactor can be used. Also the second reactor can be replaced by an axial flow monolithic gas permeable bed of perovskite active material.

By separating the reactor into two components, an excitation component and a treatment component, the excitation of the exhaust gases can be maximised, so increasing their susceptibility to the action of the perovskite material and the overall efficiency of the reactor system.

Claims

1. A plasma assisted reactor for the simultaneous removal of nitrogen oxides and carbonaceous combustion products from exhaust gases, comprising a reactor chamber adapted to be connected into a gas exhaust system, a gas permeable bed of an active material contained within the reactor, means for causing exhaust gases to pass through the bed of active material, and means for exciting into a plasma state exhaust gases passing through the bed of active material, characterised in that the bed of active material includes a mixed metal oxide material having the general formula $A_{2-x}A_x^1B_{1-y}B_y^1O_4$.
2. A plasma assisted reactor for the simultaneous removal of nitrogen oxides and carbonaceous combustion products from internal combustion engine exhaust gases, comprising a reactor chamber (1) adapted to be connected into the exhaust system of an internal combustion engine, a gas permeable bed of an active material (12) contained within the reactor (1), means (7, 13, 14, 6, 8) for causing exhaust gases to pass through the bed of active material (12), and means (6, 9, 10, 14, 5) for exciting into a plasma state exhaust gases passing through the bed of active material (12), characterised in that the bed of active material (12) includes a mixed metal oxide material having the general formula $A_{2-x}A_x^1B_{1-y}B_y^1O_4$.
3. A reactor according to claim 2 characterised in that the components $A A^1$ of the mixed metal oxide material are selected from the group of elements comprising La, Sr, Ba and K and the components $B B^1$ of the mixed metal oxide material are selected from the group of elements comprising Co, Mn, Cr, Cu, Mg and V.

- 11 -

4. A reactor according to claim 3 characterised in that the mixed metal oxide is La_2CuO_4 .

5. A reactor according to claim 3 characterised in that the mixed metal oxide active material 12 is selected from the group comprising $\text{La}_{1.8}\text{Ba}_{0.2}\text{CuO}_4$; $\text{La}_{1.7}\text{Sr}_{0.3}\text{Cu}_{0.9}\text{V}_{0.1}\text{O}_4$; $\text{La}_{1.9}\text{K}_{0.1}\text{Cu}_{0.7}\text{Cr}_{0.3}\text{O}_4$; $\text{La}_{1.8}\text{Ba}_{0.2}\text{Cr}_{0.7}\text{V}_{0.3}\text{O}_4$ and $\text{La}_{1.9}\text{K}_{0.1}\text{Cu}_{0.95}\text{V}_{0.05}\text{O}_4$.

6. A reactor according to claim 4 characterised in that the mixed metal oxide is $\text{La}_{1.9}\text{K}_{0.1}\text{Cu}_{0.95}\text{V}_{0.05}\text{O}_4$.

7. A reactor according to any of claims 2 to 6 characterised in that the bed (1) of active material is in the form of an agglomeration of bodies (12) of the active material in the form of spheres, regularly or irregularly shaped pellets or hollow extrudates.

8. A reactor according to claim 7 characterised in that the bodies (12) of active material include a ceramic binder material.

9. A reactor according to claim 8 wherein the ceramic binder material comprises silica, titania or alumina or any combination thereof.

10. A reactor according to claim 8 or claim 9 wherein the ceramic binder material is present in the proportion of about three weight per cent.

11. A reactor according to any of claims 8 to 10 wherein the bodies (12) of active material are in the form of spheres.

- 12 -

12. A reactor according to any preceding claim characterised in that the means (5, 6, 9, 10, 14) for exciting the exhaust gases into the plasma state is separate from the bed (11) of mixed metal oxide active material (12) and precedes the bed (11) of active mixed metal oxide material (12).


13. A reactor according to any of claims 1 to 11 characterised in that the means for exciting the gases to the plasma state comprises at least two electrodes (6, 14) in contact with the bed (11) of active material and means (9, 10) for applying to the electrode a potential difference sufficient to excite the exhaust gases to a plasma state in the interstices of the bed (11) of active material.

14. A reactor according to claim 13 further characterised in that a dielectric barrier is provided between the said two electrodes (6,14).

15. A reactor according to claim 14 further characterised in that the dielectric barrier is provided in the form of a coating on the surface of one or both of the said two electrodes (6, 14).


16. A reactor according to claim 13, further characterised in that a material of high dielectric permittivity is incorporated in the bed of active material.

17. A reactor according to any of claims 1 to 12 characterised in that the bed of active material (12) is in the form of a gas permeable monolith.

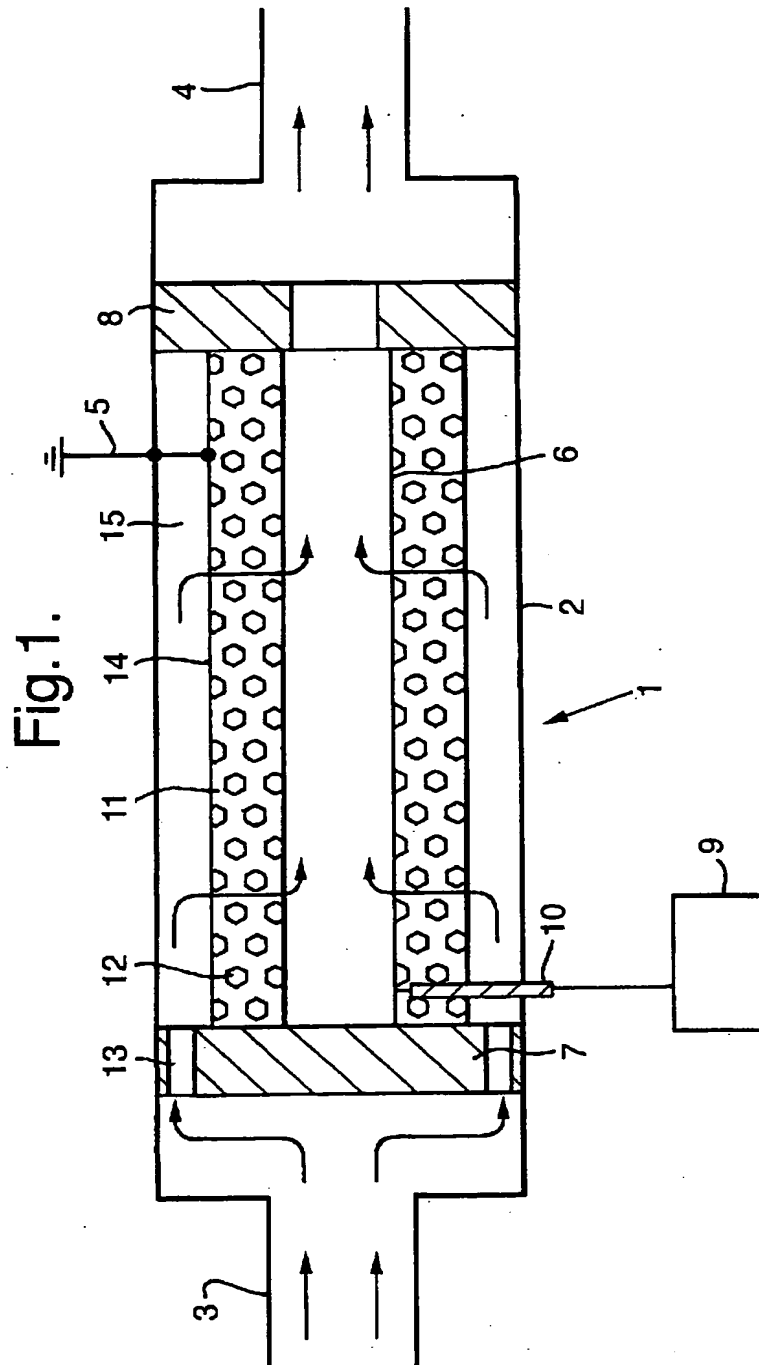

2/2

Fig.2.

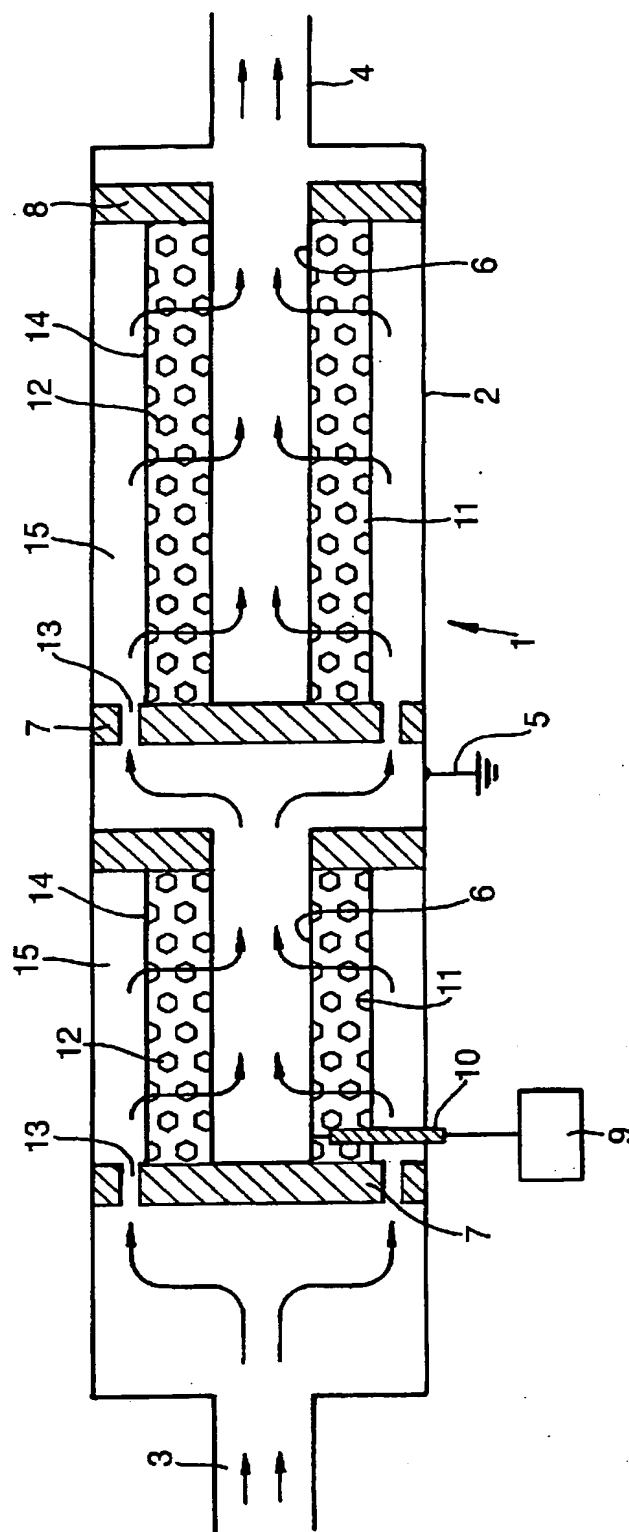

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 99/00212

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B01D53/32 B01D53/94 F01N3/08 F01N3/20 F01N3/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B01J B01D F01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 609 736 A (YAMAMOTO TOSHIKI) 11 March 1997	1,2,7-9, 11,13, 14,16 3-6,10
A	see column 2, line 8 - line 33 see column 4, line 58 - line 67 see column 6, line 54 - line 59 see column 8, line 31 - line 63 see figures 1A-4	
X	GB 2 274 412 A (ATOMIC ENERGY AUTHORITY UK) 27 July 1994 cited in the application see claims 1-7 see page 9, line 25 - line 28	1,2, 12-14

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

19 April 1999

Date of mailing of the international search report

04/05/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Borello, E

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 99/00212

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	WO 98 00221 A (LOW EMISSIONS TECHNOLOGIES RES) 8 January 1998 see page 1, line 5 - line 13 see page 8, line 19 - line 24 see page 10, line 8 - line 24 see page 11, line 27 - page 12, line 12 see page 13, line 4 - page 14, line 31 see figures 2,4 ---	1,2, 13-17 7-11
X	WO 98 02233 A (BATTELLE MEMORIAL INSTITUTE) 22 January 1998 see the whole document ---	1,2, 13-17
A	US 5 711 147 A (MERRITT BERNARD T ET AL) 27 January 1998 see abstract see column 8, line 30 - line 47 see column 13, line 13 - line 19 see figures 1,3 ---	1,2,7-9, 12-15
A	WO 91 03315 A (US GOVERNMENT) 21 March 1991 see page 5, line 6 - line 21 see page 7, line 28 - page 8, line 7; figures 1-6 ---	1,2
A	- DE 36 44 090 A (BBC BROWN BOVERI & CIE) 7 July 1988 see column 3, line 49 - line 60 ---	1-3, 13-15
A	US 3 983 021 A (HENIS JAY M) 28 September 1976 cited in the application see abstract; figure 1 ---	1,2,7,12
A	SARACCO GUIDO ET AL.: "Simultaneous Abatement of Diesel Soot and Nox by Perovskite-type catalyst" CATALYST MATERIALS FOR HIGH-TEMPERATURE PROCESSES, vol. 73, 1997, pages 27-38, XP002100243 cited in the application see the whole document -----	1-6

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No

PCT/GB 99/00212

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5609736	A	11-03-1997	US 5843288 A	01-12-1998
GB 2274412	A	27-07-1994	DE 69314928 D	04-12-1997
			DE 69314928 T	19-03-1998
			EP 0608619 A	03-08-1994
			JP 6241019 A	30-08-1994
			NO 940170 A	21-07-1994
			US 5440876 A	15-08-1995
WO 9800221	A	08-01-1998	US 5746984 A	05-05-1998
			AU 3403397 A	21-01-1998
WO 9802233	A	22-01-1998	NONE	
US 5711147	A	27-01-1998	WO 9809699 A	12-03-1998
WO 9103315	A	21-03-1991	US 4954320 A	04-09-1990
			AU 4847690 A	08-04-1991
			CA 2021692 A	01-03-1991
			DK 78191 A	27-06-1991
DE 3644090	A	07-07-1988	NONE	
US 3983021	A	28-09-1976	DE 2227949 A	04-01-1973
			FR 2140584 A	19-01-1973

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.